


Kalis 65 C


SOP 2900 lm 41 W 840 L1415mm FO IP43 white

ARTICLE NO: 13421484041

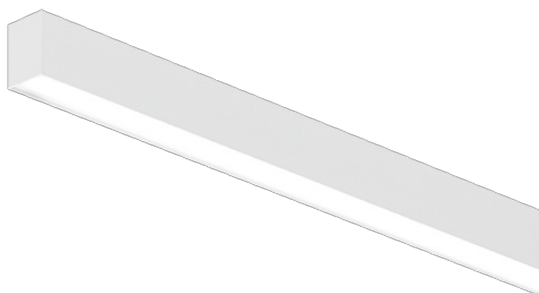

● White structure

Dimension



Dimension (mm): L: 1415 W: 36 H: 65

Product description

Installation Ceiling mounted (C) **Optic** Satin opal polycarbonate diffuser

Nominal Luminaire Luminous flux 2900 lm **Light source luminous flux** 5450 lm

Power 41 W **Correlated colour temperature - CCT** 4000 K

Colour Rendering Index - CRI 80 **Chromaticity tolerance (initial MacAdam)** 3

Lumen maintenance factor 50000h L80 B10 at 35°C **Driver** LED driver with fixed output **Power supply** 230V 50Hz **IP Protection** IP43 , IP40 mounted on the wall.

IK Protection IK08 **Weight** 2,40 kg **Package Weight** 2,80 kg **EAN number**

3831116780640 **Energy class** A++



Photometry

The photometric data and LDT / IES files for products with Emergency modules (1h, 3h), colours (other than white) and suspension lengths (3m & 5m) are in preparation and not yet available. Please refer to standard options to access the photometric data.