

Arago

7400 lm 60 W 840 FO wide UGR IP65 tempered glass white


ARTICLE NO: 15833412401



● White




Dimension



Dimension (mm): L: 1195 W: 240 H: 110

Photometry

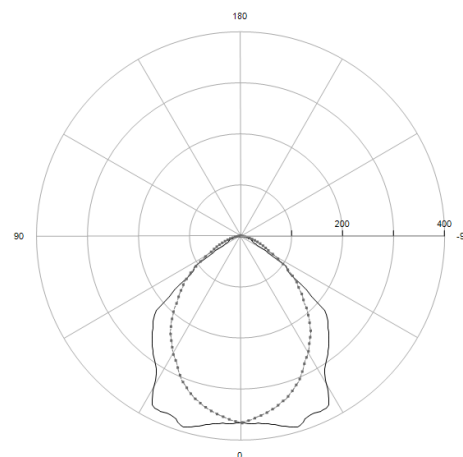

Product description

Installation Ceiling or suspended **Optic** Satin silver-coated aluminium optic with transparent tempered glass protection, wide light distribution, cross-blades for glare control UGR<21 **Material** Steel-sheet, powder coated; stainless steel AISI 316L (inox version) **Nominal Luminaire Luminous flux** 7400 lm **Light source luminous flux** 9040 lm **Power** 59.1 W **Correlated colour temperature - CCT** 4000 K **Colour Rendering Index - CRI** 80 **Chromaticity tolerance (initial MacAdam)** 3 **Lumen maintenance factor** 50000h L80 B10 at 35°C **Driver** LED driver with fixed output **Sensor** No Sensor **Power supply** 230V 50Hz **IP Protection** IP65 **IK Protection** IK08 **Package Weight** 9,60 kg **EAN number** 3831116760888 **Energy class** A++

Light output ratio

LOR	81,5
ULOR	0
DLOR	81,5
Total luminous flux	7366
Luminaire efficacy (LEF)	122

UGR values

X=4H, Y=8H	S = 0,25H
Radiant class	70/50/20
Transverse	20.1
Longitudinal	21.0

Classification

BZ	BZ 3
UTE	0.81 C
DIN	A40
CIE	60 91 99 100 81